

# PROCESSING INSTRUCTIONS

**MANUFACTURER:** EGER

**MATERIAL:** PerfectSense® TOPMATT

**Ledermann GmbH & Co. KG**  
**Willi-Ledermann-Straße 1**  
**72160 Horb am Neckar / Deutschland**

**T +49 (0)7451/930**  
**F +49 (0)7451/93270**

**[info@leuco.com](mailto:info@leuco.com)**  
**[www.leuco.com](http://www.leuco.com)**



# PROCESSING INSTRUCTIONS

EGGER PerfectSense® TOPMATT




## TABLE OF CONTENTS

	Page
1. General information .....	3
2. Trimming cut / Sizing .....	3
2.1 Panel trimming with circular saw blades .....	3
2.2 Sizing saw .....	4
2.3 Panel sizing saw .....	4
2.4 Through-feed-hogger systems .....	5
3. Milling / edging .....	5
4. Machining on stationary CNC machines .....	5
5. Drilling .....	6
6. Formulas .....	7
6.1 Cutting speed - vc .....	7
6.2 Tooth feed - fz .....	7
6.3 Feed speed - vf .....	7
7. LEUCO tools for processing EGGER PerfectSense® TOPMATT .....	7
7.1 Circular saw blades for sizing saws .....	7
7.2 Circular saw blades for panel sizing saws .....	7
7.3 Hoggers .....	8
7.4 Jointing cutters .....	8
7.5 CNC shank-type cutters .....	8
7.6 Through-hole, dowel and hinge hole bits .....	9



## PRODUCT DESCRIPTION EGGER PerfectSense® TOPMATT PANELS

The upper side of the EGGER PerfectSense® TOPMATT working surface with an edge band is covered with a TOPMATT laminate. The ultra-matte laminate surface is based on an electron beam-cured acrylic resin coating.

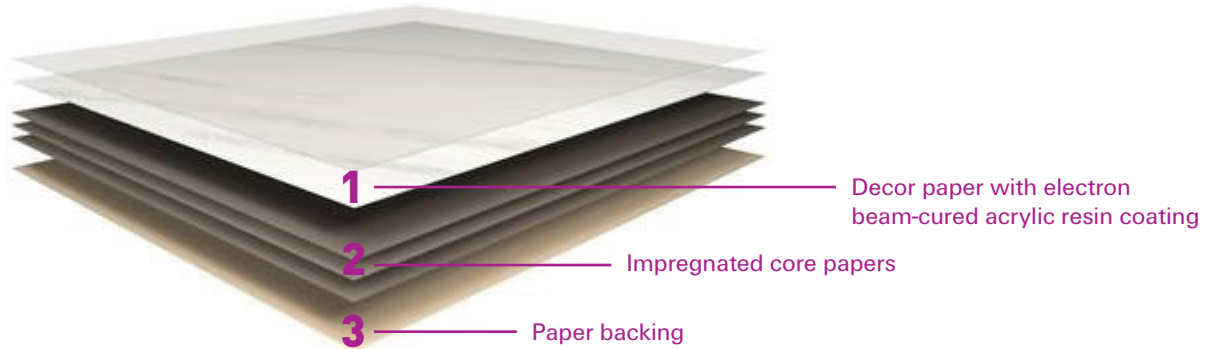

Graphic: FRITZ EGGER GmbH & Co. OG

## PROCESSING INFORMATION EGGER PerfectSense® TOPMATT PANELS

The following processing information is based on a wide variety of test series by LEUCO Ledermann GmbH & Co. KG, with the best processing results in each case.

### DEFINITION OF TERMS

**DP** = DIA; **HW** = carbide; **HR** = hollow back; **L-S** = slow, fast; **L-S-L** = slow, fast, slow; **vc** = cutting speed; **fz** = tooth feed; **vf** = feed speed

## 1. GENERAL INFORMATION


PerfectSense® TOPMATT laminates create special accents. They are characterized by their ultra-matte, pleasant-to-touch and fingerprint-resistant surface. The electron beam-cured surface coating resists abrasion, impact and scratches. This makes it ideal for horizontal and vertical surfaces subjected to high use. Applications include, for instance, tabletops and desktops, work surfaces, the fronts of furniture pieces, shelves and door elements.

## 2. TRIMMING / SIZING

### 2.1 PANEL TRIMMING WITH CIRCULAR SAW BLADES

Various factors are responsible for good trimming results:

Good side facing up, correct saw blade projection, feed rate, tooth configuration, tooth pitch, rpm and trimming speed. Depending on the volume to be cut, tungsten-carbide-tipped (HW) or diamond-tipped (DP) circular saw blades are used. **Recommended tooth configurations:**

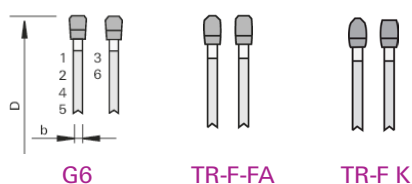



## 2.2 SIZING SAW

In general, the panels can be processed with all HW panel sizing saw blades available on the market. However, there are major differences in the cutting quality. Circular saw blades with convex flanks are particularly well-suited for an optimum cutting result with no chipping: Sizing saw blades HW "TR-F K" Anti-Fingerprint.

The sizing saw blades HW - solid Surface "TR-F-FA" can also achieve an acceptable cutting result.

**Optimum application data:** (for a Ø 300 mm circular saw blade)

Saw blade projection:	$\ddot{u}$ =20-25 mm
Speed:	n=5,000 rpm
Feed = Manual:	vf =5-8 m/min
Cutting speed:	vc=75 m/s

These circular saw blades should also be used for trimming cuts on CNC machines.

## 2.3 PANEL SIZING SAW

On panel sizing saws, the panels can be cut with HW and DP circular saw blades. For optimum finish-cut quality, the trimming cut should be made with an HW circular saw blade with convex flanks. The G6 in the HW and DP versions is recommended as the trimming saw blade. For higher volumes, it is recommended to use a DP circular saw blade for the trimming cut. Here, however, it is not possible to achieve finish-cut quality.

HW saws:	Panel sizing saw blades HW - Q-Cut „TR-F K“
DP saws:	Panel sizing saw blades DP - „G6“

**Optimum application data:** (for a Ø 450 mm circular saw blade)

Saw blade projection:	$\ddot{u}$ =15-30 mm
Speed:	n=3,600-4,200 rpm
Feed:	vf=20-25 m/min
Cutting speed:	vc=80-90 m/s

It is also important to ensure the correct saw blade projection which has an impact on the cutting quality and depends on the diameter.

### Circular saw blade diameter

- D = 250 mm
- D = 300 mm
- D = 350 mm
- D = 400 mm
- D = 450 mm

### Saw blade projection

- approx. 15 - 20 mm
- approx. 15 - 25 mm
- approx. 18 - 28 mm
- approx. 25 - 30 mm
- approx. 25 - 30 mm

The recommended cutting speed is 60 - 90 m/sec. In the case of DP and HW-tipped saw blades, the upper value must be selected. Try to aim for a feed per tooth of 0.05 - 0.12 mm.

Please refer to our YouTube channel for more information about the optimum saw blade projection. >>> Scan the QR-Code and watch the video on YouTube Alternatively, go to [www.youtube.com/leucotooling](http://www.youtube.com/leucotooling) <<<





## 2.4 THROUGH-FEED MACHINES: HOGGERS

Industrial sizing on through-feed machines is done using diamond-tipped tools. When sizing with hogger tools, outstanding results are achieved in the double hogging process. For this purpose, we recommend hoggers with low cutting pressure, such as the LEUCO PowerTec hogger. The number of hogger teeth should be matched to the respective machining feed.

The following application parameters have been used for testing all hoggers:

Speed:  $n = 6,000/\text{min}$

Feed:  $vf = 30 \text{ m/s}$




PowerTec airFace

The best results with regard to cutting quality are achieved with PowerTec hoggers. The material, however, can also be processed well with UniTec hoggers.

## 3. MILLING / EDGING

In general, tools with DP blades should be used for jointing work in the run-through process. When sizing with jointing cutters, very good results can be achieved with tools that have a shear angle of between  $35^\circ$  and  $70^\circ$ . The best results in terms of quality are achieved with jointing cutters with a  $48^\circ$  shear angle. When using two double jointer units, jointing in two steps is recommended: use the first jointer unit for the main material removal (roughing) and the second jointer unit for finishing. In addition to the use of precise hydro and HSK clamping units, this procedure creates the optimum conditions for the highest quality and high edge lives during jointing work. The optimum feed/tooth ( $fz$ ) is 0.7-0.9 mm.



DIAREX airFace jointing cutters

## 4. MACHINING ON STATIONARY CNC MACHINES

For dividing cuts, pocket milling and jointing cuts, DP-tipped shank-type cutters with alternating shear angles in the range of  $35^\circ$ - $70^\circ$  can be used. The application data and the selection of the tool depend on the requirements regarding the cutting quality and the processing in general. When high volumes need to be cut, LEUCO CM high-performance shank-type cutters  $Z=3+3$  (approx.  $43$ - $48^\circ$ ) are highly recommended, as are  $Z=2+2$  and  $3+3$  nesting cutters with a high-strength base body. DP nesting cutters  $Z=2+2$  or even DIAREX  $Z=2+2$  are suitable for moderate volumes and feed rates. LEUCO p-System tools with very high shear angles can also be used, but are only necessary if processing against an already existing edge is required. The optimum feed per tooth  $fz$  (mm) is 0.23-0.33 mm.

**Example: Reference values for the feed per tooth  $fz = 0.3$  at 18,000 rpm.**

Number of cutting edges (Z)	Diameter (mm)	Speed (rpm)	Feed rate $vf$ (m/min)
Z=2	12/20/25	18.000	10-12
Z=3	12/25	18.000	14-16
Z=4	48/60	18.000	20-22



In case of higher revolutions per minute, e.g. 24,000, the values (table on p. 5, bottom) increase accordingly by approx. 25%.

**Dividing cut:** Lower value ranges, depending on the machining situation, the values must be further reduced if necessary.

**Joining cut:** Higher value ranges.

It is generally recommended to use clamping systems with high concentric accuracy for all milling work (hydro-expansion chucks, TRIBOS or heat-shrinking chuck).

## 5. DRILLING

### Through holes:

Very good drilling quality at the entry and exit side are also achieved with standard HW through-hole bits. VHW through-hole bits, e.g. LEUCO types Mosquito and topline, can also be used and offer longer edge lives.

Recommended application parameters:

Speed: 6,000 rpm

Feed: 1.5-2.0 m/min

Drilling mode: L-S-L

### Dowel holes:

Using the standard HW-tipped dowel bits, the results are very good.

Recommended application parameters (in drilling units):

Speed: 4,500 rpm

Feed: 1.5-2 m/min

Drilling mode: L-S or S-S

### Hinge holes:


Good to very good results can be achieved with the standard or the LEUCO "Light" cylinder boring bits. In case of high production volumes, the use of DP cylinder boring bits with very long edge lives is recommended.

Recommended application parameters:

Speed: 4,000-4,500 rpm

Feed: 1.5-2.0 m/min

Drilling mode: L-S

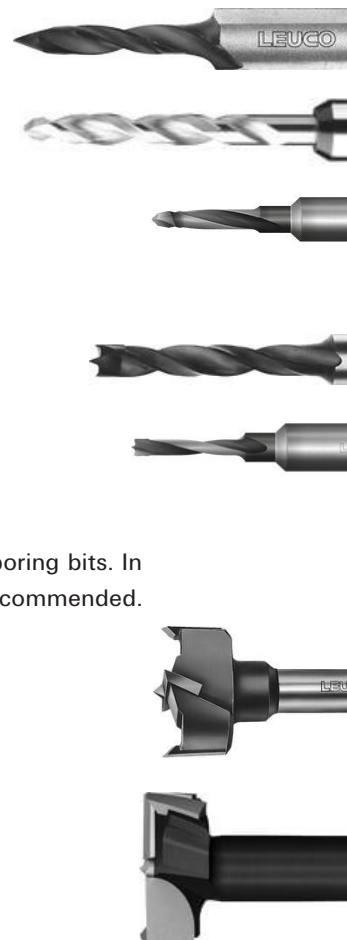



## 6. FORMULAS

### 6.1 CUTTING SPEED - VC

- | Unit: m/s
- | Data required: diameter = D [mm];  
tool speed = n [rpm]
- | Calculation:  $vc = (D * \pi * n) / (60 * 1000)$

### 6.2 TOOTH FEED - FZ

- | Unit: mm
- | Required data: feed rate = vf [m/min];  
tool speed = n [rpm]; no. of teeth = z
- | Calculation:  $fz = (vf * 1000) / (n * z)$


### 6.3 FEED SPEED - VF

- | Unit: m/min
- | Required data: tooth feed = fz [mm];  
Tool speed = n [1/min]; no. of teeth = z
- | Calculation:  $vf = (fz * n * z) / 1000$

## 7. LEUCO TOOLS FOR PROCESSING EGGER PerfectSense® TOPMATT

### 7.1 CIRCULAR SAW BLADES FOR SIZING SAWS


Dimension	Designation	Z	Tooth config.	Cutting material	Projection	Ident-No.
Ø 300 x 3,2 x Ø 30	Sizing saw blade Anti-Fingerprint	84	TR-F K	HL Board 04 plus	approx. 25 mm	193195
Ø 303 x 3,2 x Ø 30	Sizing saw blade solid Surface	84	TR-F-FA	HL Board 06 plus	approx. 25 mm	193133



| Additional saws with different diameters, cutting widths, bores and number of teeth **available upon request.**

### 7.2 CIRCULAR SAW BLADES FOR PANEL SIZING SAWS

Dimension	Designation	Z	Tooth config.	Cutting material	Projection	Ident-No.
Ø 350 x 4,0 x Ø 30	Q-Cut	72	TR-F K	HL Board 04 plus	approx. 25 mm	192974
Ø 350 x 4,4 x Ø 60	Q-Cut	72	TR-F K	HL Board 04 plus	approx. 25 mm	192975
Ø 380 x 4,0 x Ø 60	Q-Cut	72	TR-F K	HL Board 04 plus	approx. 25 mm	192976
Ø 450 x 4,0 x Ø 60	Q-Cut	72	TR-F K	HL Board 04 plus	approx. 25 mm	192978




| Additional saws with different diameters, cutting widths, bores and number of teeth **available upon request.**

| Number of teeth and feed rate depend on cutting height and application for single panels or stack cuts.




### 7.3 HOGGERS

Dimension	Designation	Z	Cutting material	Ident-No.(L)	Ident-No.(R)
Ø 250 x 9,5 x Ø 60	PowerTec airFace	20+10	DP	186528	186527
Ø 250 x 9,5 x Ø 60	PowerTec airFace S	20+20	DP	186552	186551
Ø 250 x 8,0 x Ø 60	UniTec Hoggers CM	36+18	DP	182030	182031



PowerTec airFace




UniTec Hogger


Additional hoggers with other dimensions available on request.

### 7.4 JOINTING CUTTERS


Dimension	Designation	Z	Cutting material	Machine	Shear<	Ident-No. (L)	Ident-No. (R)
Ø 125 x 42,8 x Ø 30	DIAREX airFace	3+3	DP	Homag	48°	186323	186323
Ø 100 x 42,8 x Ø 30	DIAREX airFace	3+3	DP	SCM	48°	186362	186363
Ø 125 x 47,8 x Ø 30	p-System	3+3	DP	Homag	70°	184071	184071
Ø 125 x 62,5 x Ø 30	p-System	3+3	DP	IMA 08.379	70°	184989	184990
Ø 85 x 43,2 x Ø 30	DIAMAX airFace	3+3	DP	OTT	35°	186408	186409
Ø 125 x 43,2 x Ø 30	DIAMAX airFace	3+3	DP	Homag	35°	186399	186399
Ø 100 x 43 x Ø 30	SmartJointer airFace	3+3	DP	Brandt	35°	186065	186066
Ø 125 x 63 x Ø 30	SmartJointer airFace	3+3	DP	IMA 08.379	43°	186055	186056



DIAREX/  
DIAMAX airFace



p-System  
jointing cutters




SmartJointer  
airFace


Additional jointing cutters with different diameters, cutting widths, bores, and numbers of teeth available upon request.

### 7.5 CNC SHANK-TYPE CUTTERS


Dimension	Designation	Z	Cutting material	L/R	Ident-No.
Ø 20 x 28 x Ø 25	DIAREX high-performance cutter	2+2	DP	R	186151
Ø 25 x 28 x Ø 25	High-performance cutter, negative	3+3	DP	R	186120
Ø 25 x 26,5 x Ø 25	p-System shank-type cutter	2+2	DP	R	184382
Ø 60 x 38 x Ø 25	p-System shank-type jointing cutter	4+4	DP	R	184084
Ø 48 x 28 x Ø 25	High-performance trimming cutter	4+2+4	DP	R	186142
Ø 12 x 22 x Ø 16	Nesting cutter, positive	2+2	DP	R	187075
Ø 12 x 23 x Ø 16	Nesting cutter, negative	3+3	DP	R	185518




High-performance  
trimming cutter DP




Nesting cutter,  
negative/positive



DIAREX high-perfor-  
mance cutter DP



p-System shank-type  
jointing cutter



p-System shank-  
type cutter

Further shank-type cutters with other dimensions are available upon request.





## 7.6 THROUGH-HOLE, DOWEL AND HINGE HOLE BITS


Dimension	Designation	Cutting material	Ident-No. (L)	Ident-No. (R)
Ø 5 L1=70 x Ø 10	Through-hole bit with back-guide	HW	176255	176254
Ø 8 L1=70 x Ø 10	Through-hole bit with back-guide	HW	176257	176256
Ø 5 L1=70 x Ø 10	Mosquito through-hole bit	VHW	183153	183152
Ø 8 L1=70 x Ø 10	Mosquito through-hole bit	VHW	183157	183156
Ø 5 L1=70 x Ø 10	topline through-hole bit	VHW	185742	185741
Ø 8 L1=70 x Ø 10	topline through-hole bit	VHW	185744	185743


Dimension	Designation	Cutting material	Ident-No. (L)	Ident-No. (R)
Ø 5 L1=70 x Ø 10	Dowel bit with back-guide	HW	167203	167194
Ø 8 L1=70 x Ø 10	Dowel bit with back-guide	HW	167205	167196
Ø 5 L1=70 x Ø 10	topline dowel bit	VHW	185760	185759
Ø 8 L1=70 x Ø 10	topline dowel bit	VHW	185764	185763


Dimension	Designation	Cutting material	Ident-No. (L)	Ident-No. (R)
Ø 35 L1=70 x Ø 10	Standard cylinder boring bit	HW	178982	172254
Ø 15 L1=70 x Ø 10	"Light" cylinder boring bits	HW	184685	184684
Ø 35 L1=70 x Ø 10	"Light" cylinder boring bits	HW	184689	184688
Ø 35 L1=70 x Ø 10	Cylinder boring bit Z=2+4	DP	on request	186783




Through-hole bit with back-guide




Mosquito through-hole bit




topline through-hole bit




Dowel bit with back-guide



topline dowel bit



"Light" cylinder boring bits



Cylinder boring bit Z=2+4

Additional drill bits with other dimensions, cutting lengths and shank dimensions are **available upon request**.

→ Couldn't find the tool type or tool dimensions you want?  
Please contact LEUCO Sales.

T +49 (0)7451/93-0  
F +49 (0)7451/93-270

info@leuco.com

## TIP – LEUCO ONLINE CATALOG

You can find the LEUCO tool recommendations for processing EGGER PerfectSense® TOPMATT panels in the LEUCO online catalog.



Alternatively:  
Scan the QR-Code and  
learn about the LEUCO  
warehouse program.

QUICK &  
EASY

- 1 [www.leuco.com/products](http://www.leuco.com/products)
  - 2 Click "tool" filter
  - 3 "special manufacturer materials"
  - 4 „EGGER“
  - 5 „PerfectSense® TOPMATT“
- Select saw blades, hoggers, cutters, drill bits



Ledermann GmbH & Co. KG  
Willi-Ledermann-Straße 1  
72160 Horb am Neckar / Deutschland

T +49 (0)74 51/93 0  
F +49 (0)74 51/93 270

info@leuco.com  
www.leuco.com